



EU-ENCLOSED UNIT

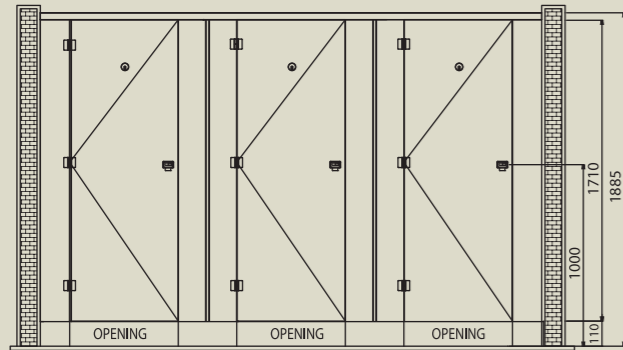


FRONT VIEW (EU)

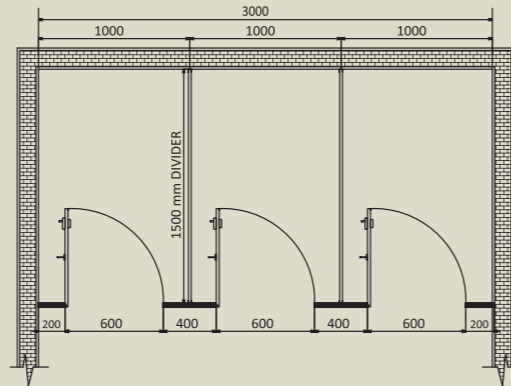


TOP VIEW (EU)

CU-CORNER UNIT

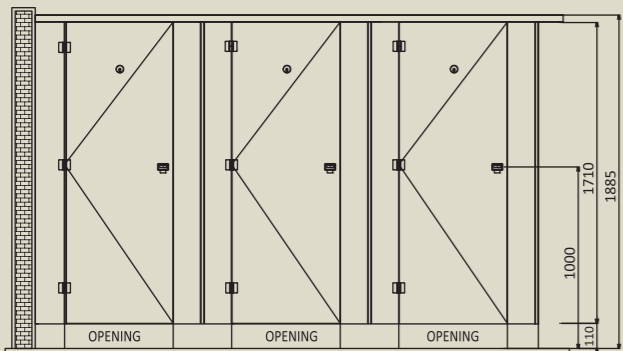

FRONT VIEW (CU)

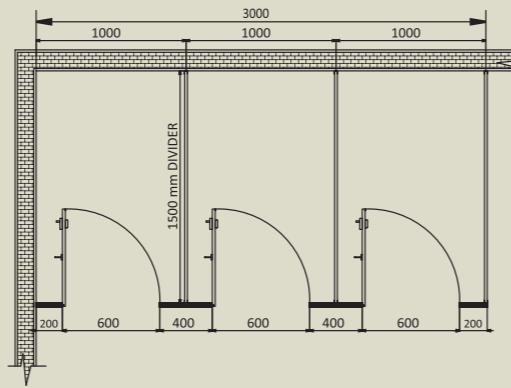

TOP VIEW (CU)


HARDWARE FIXING DETAILS

All pilasters are supported by L-bracket with floor anchor bolt. The L-bracket is concealed with stainless steel flat box up of up to 100 mm height. The stainless steel shoe box up is available in SS Grade 304 and 316 options. The divider panels are fixed onto the wall with stainless steel (Grade 304) U-channel section and SS Grade 304 screw inserts. Further all pilasters are fixed with a stainless steel (Grade 304) top rail at the top and doors are incorporated with the noise deafenin tape to reduce the noise effect.



HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

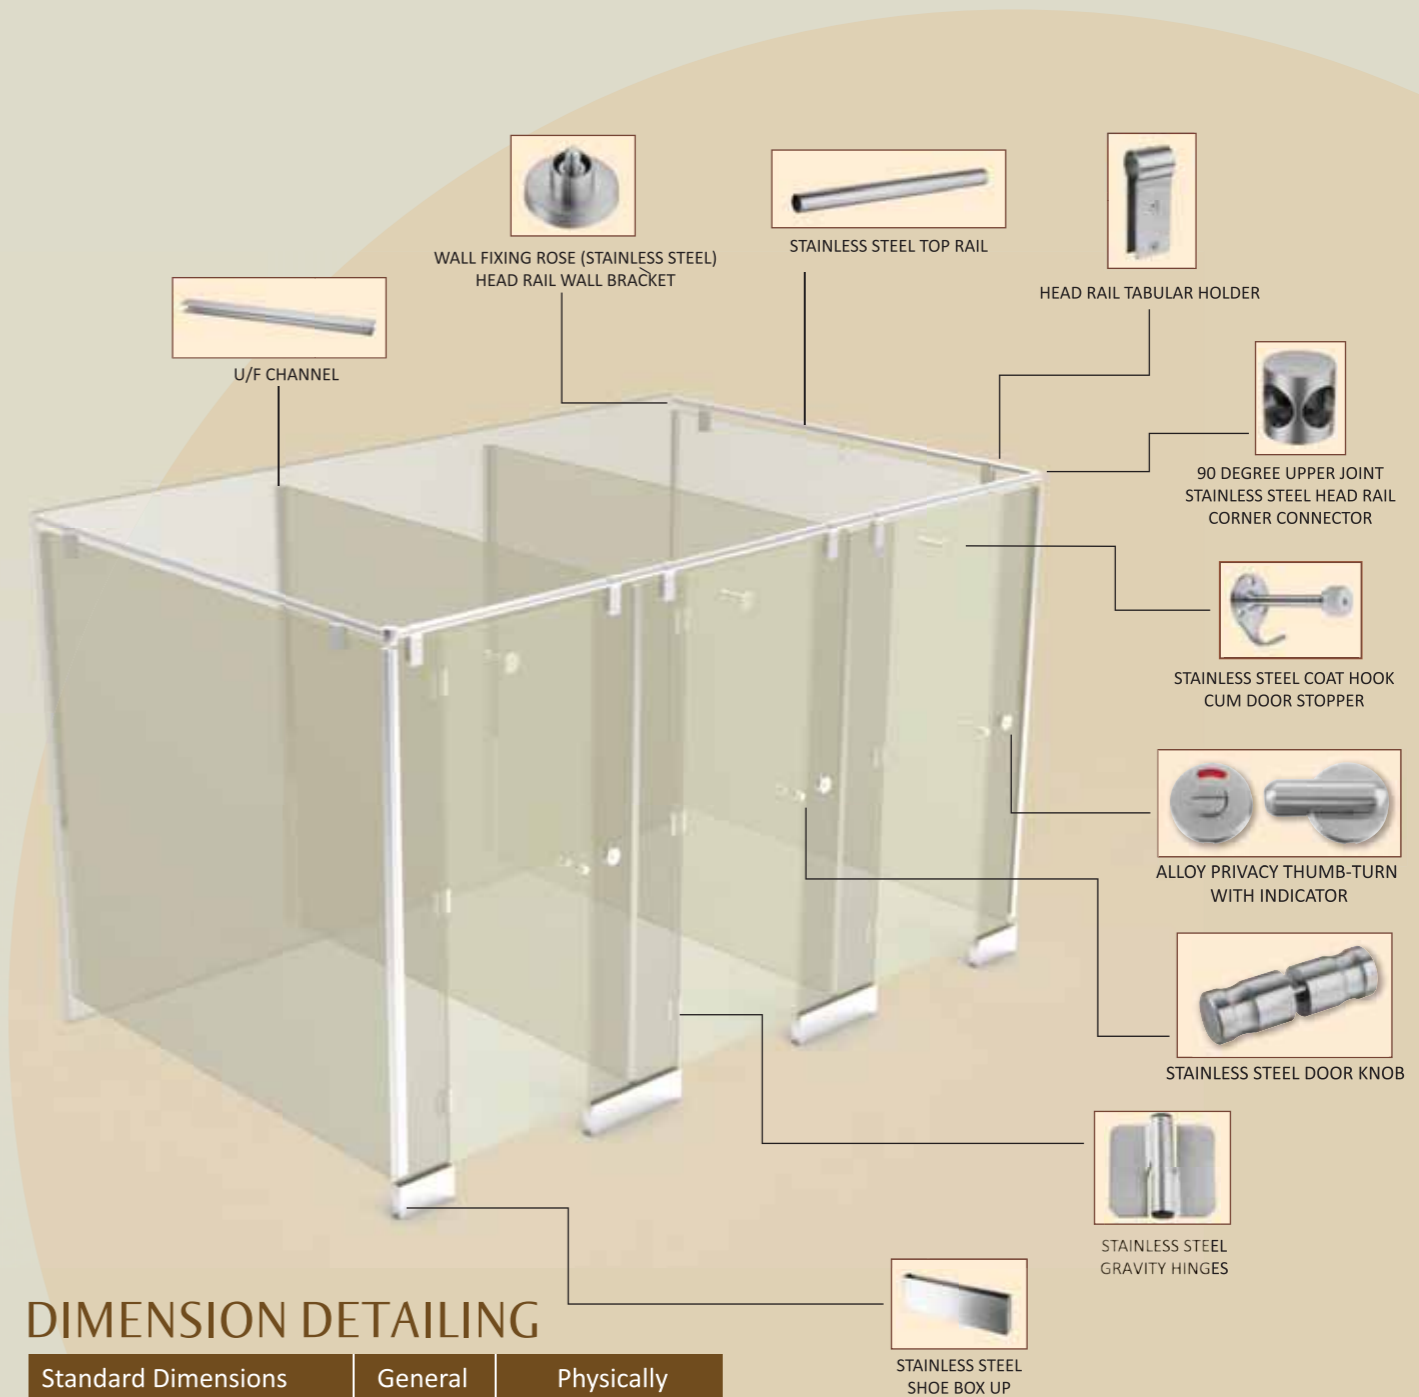

DIMENSION DETAILING

Standard Dimensions	General (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	1885	1885
Width of door	600	900
Height of door	1710	1710
Ground clearance	110	110

Note:

- Invincible (12 mm, shoe box up) models come with stainless steel (Grade 304) top rail arrangement
- Invincible (12 mm, shoe box up) model is also available with stainless steel sliding and aluminum top rail fittings
- Shoe box up and adjustable foot are available in two options-stainless steel Grade 304 and 316
- On special demand, overall height of restroom cubicle can be increased up to 2100 mm