



EU-ENCLOSED UNIT

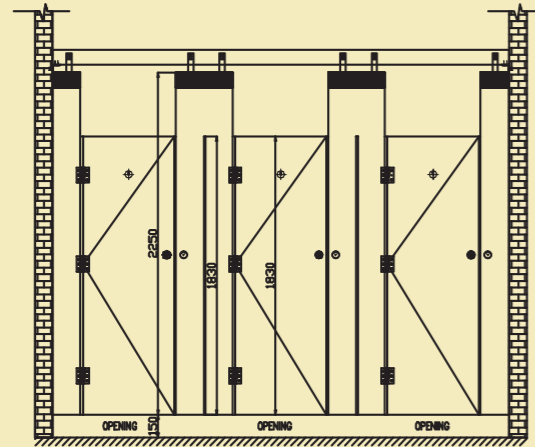


FRONT VIEW (EU)

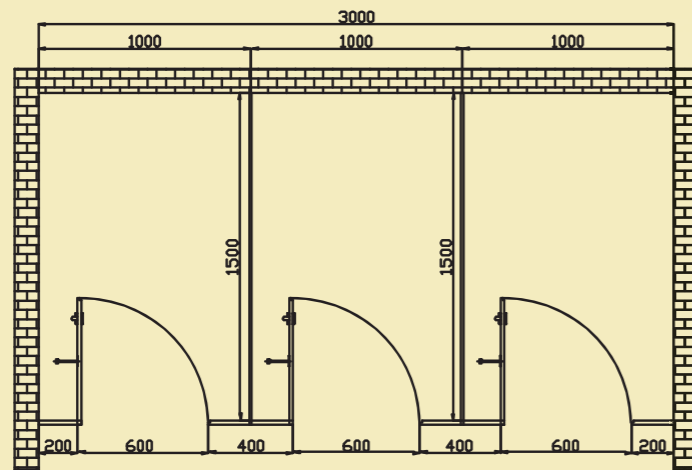

TOP VIEW (EU)


HARDWARE FIXING DETAILS

The aluminum hollow rectangle channel is first held above the false ceiling on both ends by MS'L' angle which is fixed onto the wall with 3 set of quality steel wall plus c/w bolts. The rectangle steel plates are next distributed equally, taking into consideration the position of the pilasters, and fixed onto the hollow MS top rail using bolts and screws.

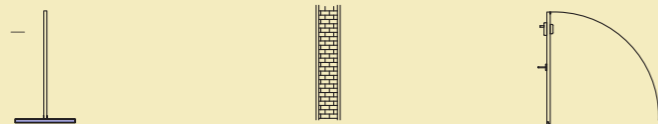

HARDWARE DETAILING

Each restroom cubicle is equipped with the following set of hardware fittings:

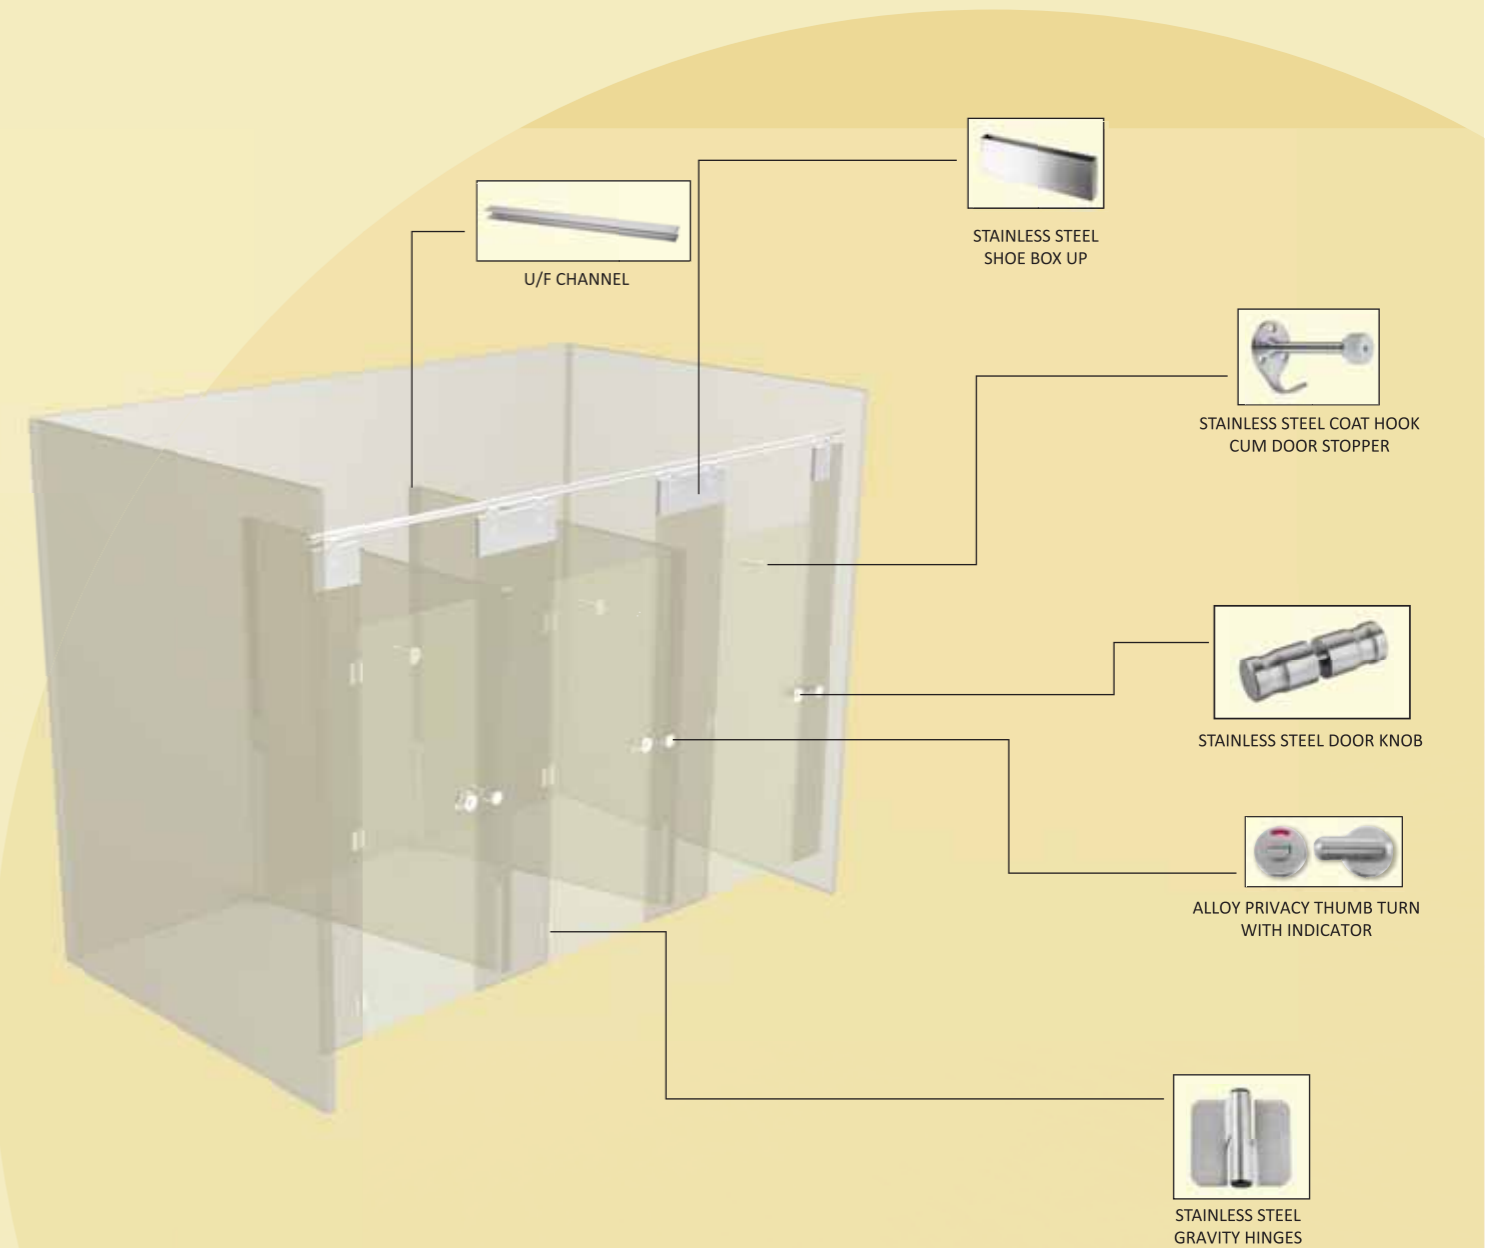

DIMENSION DETAILING

Standard Dimensions	General (mm)	Physically Challenged (mm)
Width of cubicle	1000	1500
Depth of cubicle	1500	1750
Height of entire cubicle	2400	2400
Width of door	600	900
Height of door	1830	1830
Ground clearance	100	100